




Bulletin 700-FS

- Adjustable Function and Timing Range Timing Relays
- DIN Rail Mounted without Cost of Socket
- 22.5 mm Wide Multifunction or Single Functions
- Available as SPDT or DPDT Contact Output, 8 A
- Timing Ranges From 0.05s...60h

Table Of Contents

Product Selection 120
Accessories 122
Connection Diagrams 123
Specifications 126

Catalog Number Explanation

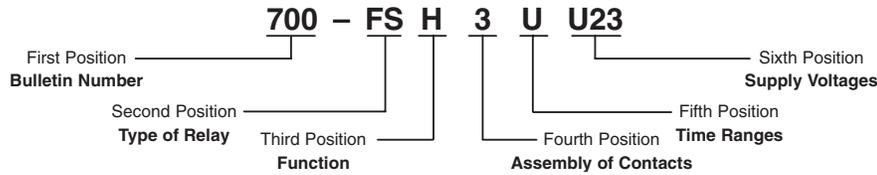

Single-Function (With SPDT 1 C/O contacts)

700-FS	A	3	A	U23
	Function	Contact Outputs	Time Ranges	Supply Voltages
	A On-delay ❶ B Off-delay ❶ C On- and off-delay ❶ D One shot ❶ E Fleeting off-delay ❶ F Flasher (repeat cycle starts with pulse) ❶ G Flasher (repeat cycle starts with pause) ❶ I On-delay pulse generator ❶ J On-delay (pulse controlled) ❶ K One shot / watch dog (pulse controlled) ❶ L Pulse converter ❶	All functions: 3 1 Change-over contact (SPDT) 1 C/O	A 0.05...1 s B 0.15...3 s C 0.5...10 s D 1.5...30 s E 0.05...1 min F 0.15...3 min G 0.5...10 min H 1.5...30 min I 0.05...1 h J 0.15...3 h K 0.5...10 h L 3.0...60 h U 0.05 s...60 h ❷	Z12 12V DC U23 24...48V DC 24...240V AC 50/60 Hz

Single Function (With 2PDT 2 C/O contacts)

Functions Available	Contact Outputs	Time Ranges	Supply Voltages	Cat. No.	Factory-stocked Item
ON-Delay	(DPDT) 2 C/O	0.05 s...60 h ❸	12V DC	700-FSA4UZ12	
ON-Delay	(DPDT) 2 C/O		24...48V DC 24...240V AC 50/60 Hz	700-FSA4UU23	✓
OFF-Delay	(DPDT) 2 C/O		12V DC	700-FSB4UZ12	
OFF-Delay	(DPDT) 2 C/O		24...48V DC 24...240V AC 50/60 Hz	700-FSB4UU23	✓

❶ Factory-stocked item.
 ❷ Valid for functions "A" and "B" only.
 ❸ The time range of "0.05 s...60 h" is selectable in 12 smaller ranges plus an ON and OFF function for maintenance needs.

Multi-Function (This device offers you the flexibility of selecting one of 8 single timing functions.)


Functions Available	Contact Outputs	Time Ranges	Supply Voltages	Cat. No.	Factory-stocked Item
M Multi-function timing relays 8 Single-functions: A, B, C, D, E, F, I, and L ON and OFF function additional (for installation and maintenance) note: See next page for function description.	(SPDT) 1 C/O	0.05 s...60 h ❶	12V DC	700-FSM3UZ12	
	(SPDT) 1 C/O		24...48V DC 24...240V AC 50/60 Hz	700-FSM3UU23	✓
	(DPDT) 2 C/O		12V DC	700-FSM4UZ12	
	(DPDT) 2 C/O		24...48V DC 24...240V AC 50/60 Hz	700-FSM4UU23	✓

Special Function

Functions Available	Contact Outputs	Time Ranges	Supply Voltages	Cat. No.	Factory-stocked Item
Flasher (Repeat cycle starting with pulse or pause)	SPDT (1 C/O)	0.05 s...60 h ❶	12V DC	700-FSH3UZ12	
			24...48V DC 24...240V AC 50/60 Hz	700-FSHUU23	
		2 x 0.05 s...60 h (2 ranges)	12V DC	700-FSH3VZ12	
			24...48V DC 24...240V AC 50/60 Hz	700-FSH3VU23	✓
OFF-delay without supply voltages (True OFF-delay) ❷	SPDT (1 C/O)	0.15 s...10 m ❷	24...240V DC	700-FSQ3QU18	✓
	DPDT (2 C/O)		24...240V AC 50/60 Hz	700-FSQ4QU18	✓
Star-Delta	2 N.O. + 1 common	0.5 s...10 s	24...48V DC	700-FSY2CU23	
		1.5...30 s		700-FSY2DU23	
		0.05 s...1 min.	24...240V AC 50/60 Hz	700-FSY2EU23	
		0.15...3 min.		700-FSY2FU23	
		0.5...10 min.		700-FSY2GU23	

- ❶ The time range of "0.05 s...60 h" is selectable in 12 smaller ranges plus an ON and OFF function for maintenance needs.
- ❷ This time range is selectable in four smaller ranges: 0.15 s...2.5 s, 0.5 s...10 s, 4 s...80 s, 30 s...10 min.
- ❸ Due to shock during shipment, the state of the contacts should be verified before initial use.

Multi-Function Timing Relay Function and Time Range Settings

Description	SPDT	DPDT
 <p>Multi-function timing relays 700-FSM3U includes 10 setting functions:</p> <p>(A) On-delay (B) Off-delay (C) On- and off-delay (D) One shot (E) Fleeting off-delay (F) Flasher (repeat cycle starts with pulse) (I) On-delay pulse generator (L) Pulse converter (On) ON-Function * (Off) OFF-Function * * (for installation and maintenance)</p> <p>Note: Switch ⊗ is on DPDT relays only. When switch is down, one contact is instantaneous and one is timed. When switch is up, both contacts are timed.</p>		
	Multi-Time Setting Range 0.05 s...60 h (1 s) 0.05...1 s (3 s) 0.15...3 s (10 s) 0.5...10 s (1 min) 0.05...1 min (3 min) 0.15...3 min (10 min) 0.5...10 min (1 h) 0.05...1 h (3 h) 0.15...3 h (10 h) 0.5...10 h (60 h) 3...60 h	
		


Bulletin 700-FS
Timing Relays

Accessories


	Description	Qty.	Cat. No.
 	Setting Knob with Scale (for time setting without tools)	10	700-FSK
	Panel Mounting Adapter For surface mounting according to drilling plan EN 50 002	5	199-FSA
   	Labeling Sheet: 10 sheets with 105 self-adhesive paper labels each, 6 x 17 mm Marking Tag Sheet: 10 sheets with 160 perforated paper labels each, 6 x 17 mm Transparent Cover: To be used with marking tag sheets Marking Tag Carrier: To be used with label strip System Bulletin 1492-W	10 10 100 100	100-FMS 100-FMP 100-FMC 100-FMA2 ❶

❶ Cat. No. 100-FMA2 is only a marking tag carrier. Please refer to the Terminal Block Accessories section, page 12-174 of publication A113 for appropriate marker cards to be used with this carrier.


(A) On-Delay

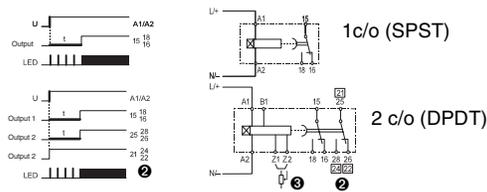


(B) Off-Delay (Min. Pulse AC 50 ms...DC 30 ms)

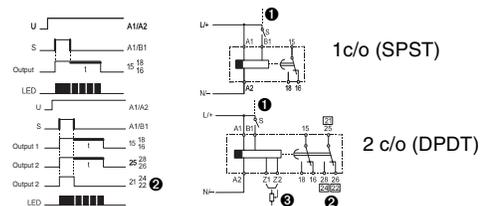


(C) On- and Off-Delay

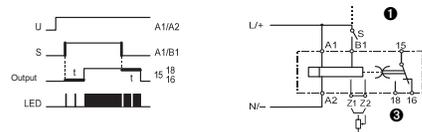


(D) One Shot



(E) Fleeting Off-Delay (Min. Pulse AC 50 ms...DC 30 ms)

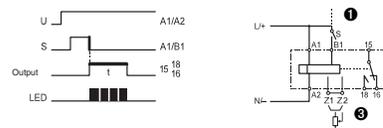


(F) Flasher (Repeat Cycle Starts with Pulse)




(G) Flasher (Repeat Cycle Starts with Pause)



(I) On-Delay Pulse Generator




(J) On-Delay (Pulse Controlled)




(K) One Shot/ Watch Dog (Pulse Controlled)




(Off) OFF-Function



(On) ON-Function



(L) Pulse Converter (Min. Pulse AC 50 ms...DC 30 ms)

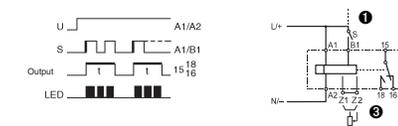


Cleverly Designed Function Display LED (Green)

- Output in rest position, no timing
- Output in rest position, time running
- Output in operation position, no timing
- Output in operation position, time running

- ❶ A voltage other than the supply voltage can be used at B1, but must be within voltages specified on timer.
- ❷ Output 2 is selectable as instantaneous contact with sliding switch (⊗) on front panel (instantaneous when switch is down, timed when switch is up).
- ❸ Available on multifunction "M," and single function "A" or "B" option timing relays along with code "4" (2PDT contacts). Bridge or potentiometer 10 kΩ, min. 0.25 W (low voltage) for external time setting. Set timer dial to 0.0.

Special Function Flasher (Repeat Cycle Starting with Pulse or Pause) Timing Relays

Description

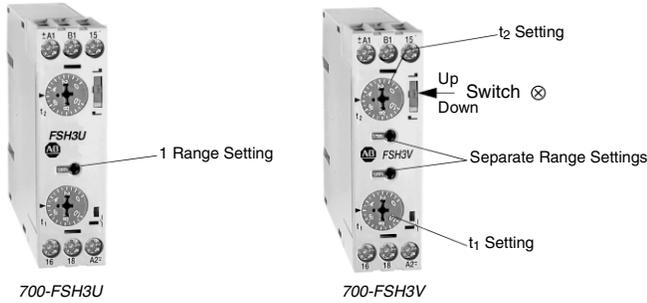

Supply Voltages (A1/A2)
Z12 12V DC
U23 24...48V DC,
24...240V AC, 50/60 Hz

Function Diagram / Connection Diagram


(H) Flasher (Repeat Cycle Starting with Pulse or Pause)

The repeat cycle timer permits different settings for on and off times.

The following operating modes are possible:

- Oscillating mode; repeat cycle starts with voltage applied at A1 and B1, and continues to repeat until voltage is off.
- One cycle mode; started by energizing B1 with voltage on A1 and A2.
- Output starts with pulse or pause (switch ⊗ Up or Down).
- 700-FSH3U provides (1) range setting for t_1 and t_2 .
- 700-FSH3V provides (2) range settings for t_1 and t_2 .

Supply Voltage Controlled, Oscillating Mode Starting with Pause — Switch ⊗ is Up

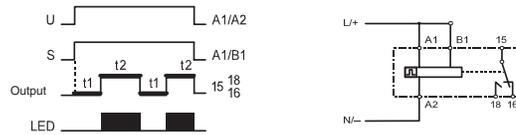


Supply Voltage Controlled, Oscillating Mode Starting with Pulse — Switch ⊗ is Down



Pulse Controlled, Output Starts With Pause (Min. Pulse AC 50 ms — DC 30 ms) — Switch ⊗ is Up One Cycle Mode — Voltage Supplied at A1 and A2, then Pulsing "s" to Energize B1 will Initiate One Cycle.



Pulse Controlled, Output Starts with Pulse (Min. Pulse AC 50 ms — DC 30 ms) — Switch ⊗ is Down One Cycle Mode — Voltage Supplied at A1 and A2, then Pulsing "s" to Energize B1 will Initiate One Cycle.

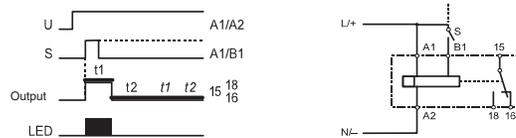


Note: If B1 is pulsed, a one full time cycle consisting of t_1 and t_2 is completed.

LED Operation Chart — Green LED

LED	Output at Shelf State, No Timing — LED Off
LED	Output at Shelf State, Time is Running — LED Flashing
LED	Output NO Contact is Closed, No Timing — LED On
LED	Output NO Contact is Closed, Time is Running — LED Long Flashing


Function Diagram/Connection Diagram

(Q) Off-Delay without Supply Voltage (True Off-Delay) — When input power is turned on, the output contact changes state. When the power is removed, the time delay begins. The output contact returns to shelf state at the end of the time delay.



Note: Min. pulse (t) required:

- 24V DC: 200 ms
- 24V AC: 325 ms
- 240V DC: 200 ms
- 240V AC: 175 ms

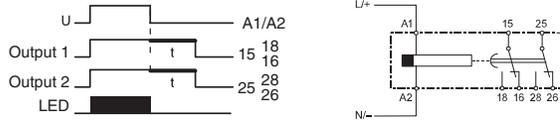

(Y) Star-Delta Timing Relay — When power is applied, the output contact 17/18(Y) changes state. After the time setting, the output contact 17/18(Y) returns to shelf state. After the fixed time (50... 60 ms), the output contact 17/28Δ changes state. Both output contacts return to shelf state whenever the power is removed.



Specifications

Time Characteristics (according to VDE 0435, Part 2021)

Setting Accuracy	±5% of full scale
Repeatability	±0.2% of the setting values
Tolerance	Voltage: ±0.001%/ΔU Temperature: ±0.025%/°C

Supply

Supply Voltages	24...48V DC and 24...240V AC, 50/60 Hz (multi voltage)
Voltage Tolerance	-20...+20% (DC), -15...+10% (AC)
Power Consumption	0.5 W at 24V DC, 5 VA at 240V AC
Time Energized	100%
Reset Time	50 ms
Voltage Interruption	≤ 20 ms without reset (supply voltage)
Cable Length (Supply Voltage Control)	Max. 250 m (800 ft)

Pulse Control (B1)

Pulse Duration	≥ 50 ms (AC), ≥ 30 ms (DC)
Input Voltage	Supply voltage range
Input Current	1 mA
Max. Leakage Current	400 micro Amps
Cable Length	Max. 250 m (800 ft) without parallel load between B1 and A2 Max. 50 m (160 ft) with load (<3 kΩ) between B1 and A2

Outputs

Contact Type	Relay as changeover switch
Switching Capacity	Voltage: 440V AC Current I _{th} (AC-1): 8 A (5 A for 700-FSQ) Power: 2000 VA According to IEC 947-5-1: 3 A/440V AC (inductive load, AC 14) 3 A/250V AC (inductive load, AC 15) 1 A/24V DC (inductive load, DC 13) According to UL 508: 1.5 A/250V AC (B300) 3 A/120V AC (B300)
Short-Circuit Resistance	10 A gL
Life	Mechanical: 30 million operations Electrical operations: 4 Mil. at 1 A/250V AC, cos φ = 1 0.2 Mil. at 6 A/250V AC, cos φ = 1 1.5 Mil. at 1 A/250V AC, cos φ = 0.3 0.3 Mil. at 3 A/250V AC, cos φ = 0.3 0.5 Mil. at 6 A/24V DC, resistive 2 Mil. at 4 A/24V DC, resistive 2 Mil. at 0.2 A/230V DC, resistive 1 Mil. at 0.4 A/24V DC, L/R = 20 ms 1 Mil. at 0.2 A/110V DC, L/R = 20 ms 1 Mil. at 0.1 A/230V DC, L/R = 20 ms
State Indicator	1 LED, combination signal

General Data

Insulation Characteristics	2 kVAC/50 Hz test voltage according to VDE 0435 and 6 kV 1.2/50 μs surge voltage according to IEC 947-1 between all inputs and outputs
EMC/Interference Immunity	Performance of following requirements: Surge capacity of the supply voltage according to IEC 1000-4-5: 4 kV 1.2/50 μs Burst according to IEC 1000-4-4: 6 kV 6/50 ns ESD discharge according to IEC 1000-4-2: Contact 8 kV, air 8 kV Electromagnetic HF field according to IEC 801-3 and conducted electromagnetic HF signal according to IEC 801-6: Level 3
EMC/Emission	Electromagnetic fields according to EN 55 022: class B
Safe Isolation	According to VDE 106, part 101

Climatic Withstand	56 Cycles (24 h) at 25...40°C and 95% relative humidity according to IEC 68-2-30 and IEC 68-2-3
Vibration Resistance	4 g in 3 axes at 10...500 Hz, test FC according to IEC 68-2-6
Shock Resistance	50 g according to IEC 68-2-27
Protection Class	Enclosure: IP 40 IP 30 (Single-function) Terminal: IP 20 according to IEC 947-1
Weight	100 g
Approval	UL, C-UL
Ambient Temperature	Open: -25...+60°C Enclosed: -25...+45°C Storage: -40...+85°C
Terminals	Screw terminal M3.5 for Number 2 Posidrive, Philips, and slotted screws. Suitable for power screwdriver. Rated tightening torque 8.8 lb.-in. (0.8 N•m, max. 1.2 N•m). Dual-chamber system for terminal cross-sections of 1 x 0.5 mm ² ...2 x 2.5 mm ² (solid) or stranded 2 x 2.5 mm ² (flexible with sleeve), #20...14 AWG. Finger protection according to VDE 0106.
Mounting	Front mounting; For snap-on mounting on 35 mm DIN Rail or screw fixing by adapter and 2 screws (M4 type)
Disposal	Synthetic material without dioxin according to EC/EFTA notification Number 93/0141/D electrical contacts with cadmium
Certifications	cUL Recognized, File E14840, cULus Listed, File E14840, Guide NKCR, CE Marked (per EU Low Voltage Directive 73/23 EEC 93/68 EEC: per Electromagnetic Compatibility Directive 89/336 EEC 92/31 EEC 93/681 EEC)
Standards	EN 60947-1, EN 60947-5-1, EN 50081-1, IEC 947, UL 508, CSA 22.2

Performance Data — See page Important-2, publication A113.